



Norbord®

make it better



CaberfixD4®


www.norbord.co.uk

Cabershield® and CaberfixD4®

Step by step application guide


Step 1. Adhesive I-joist application

Apply one continuous bead of CaberfixD4 adhesive to the top of the joist or I-joist. Use CaberfixD4 adhesive on joists and noggins in the area that is about to be directly laid.

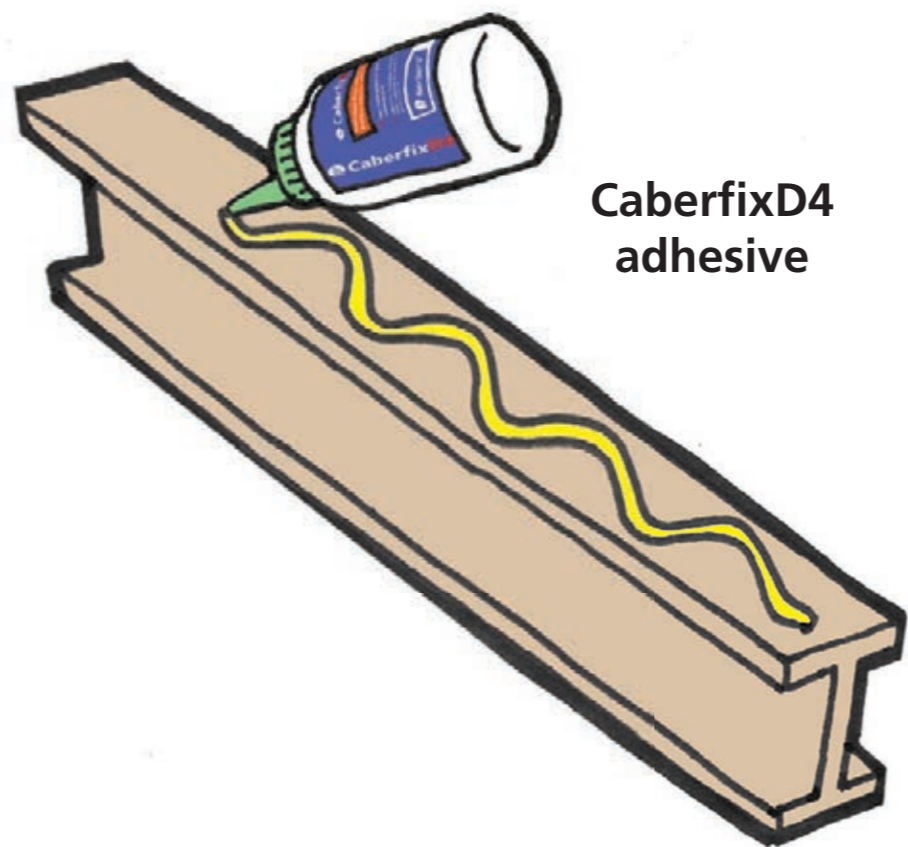

Step 2. Perimeter panel fixing

Panels should be fixed at perimeter, using annular ringshank nails or screws at 200–300mm centres. Fix flush or just below panel surface.

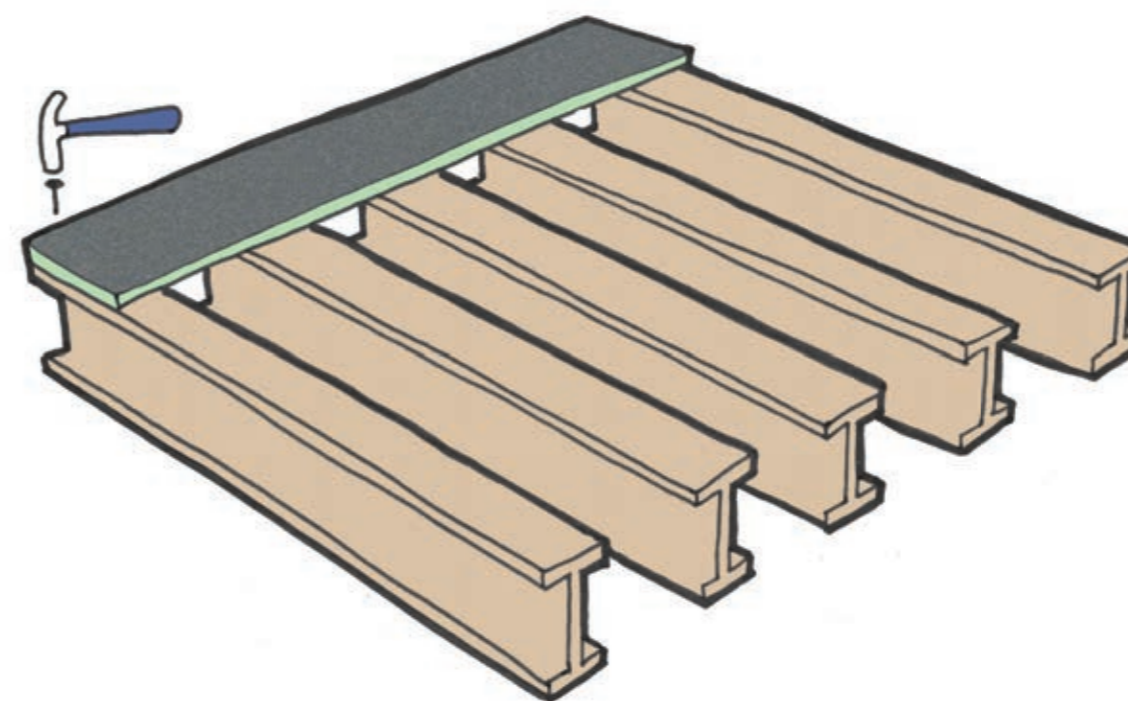


Step 3. Adhesive Tongue & Groove application

A liberal application of CaberfixD4 Adhesive should be made to both the tongue and groove of the profile joint of each panel to ensure that the entire joint is bonded. When boards are pushed together a small amount of adhesive should be squeezed out of the T&G. This seals the joint at the T&G.




Step 4. Panel fixings

Continue laying boards in a staggered format. Panels may be secretly nailed through the tongue at T&G joints. For optimum performance we recommend a minimum of 5 mechanical fixings per 22 x 2400 x 600mm board when fitted at 600mm centres.

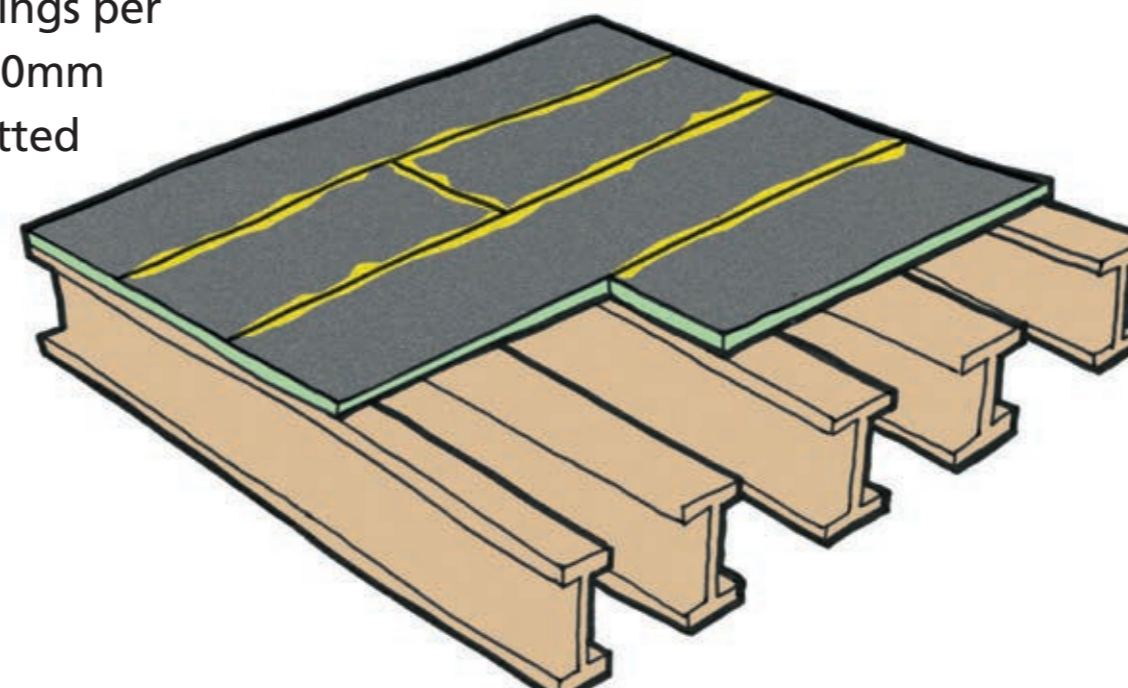


Step 5. Complete sealing

For complete weather-tightness apply CaberfixD4 to exposed nail heads, cut edges and any exposed perimeter edges.

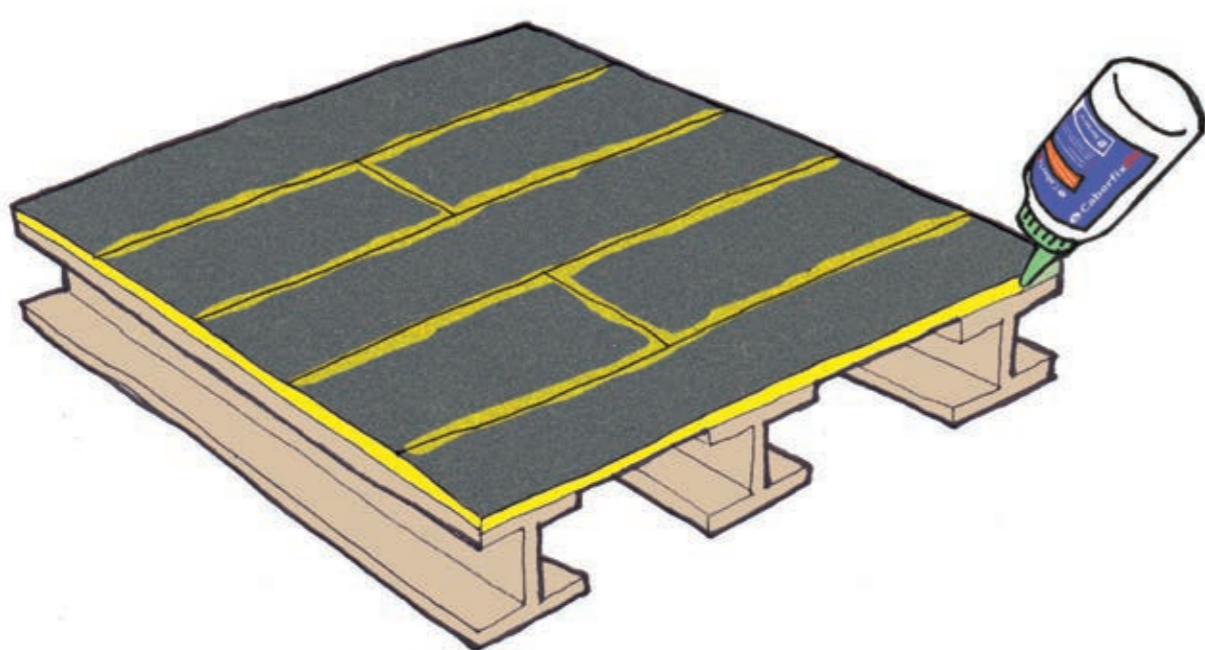

Step 6. Clean down

When all construction and decoration work is complete and the building is weather tight, the deck should be cleaned down: Once dry, any excess adhesive should be removed with a scraper.

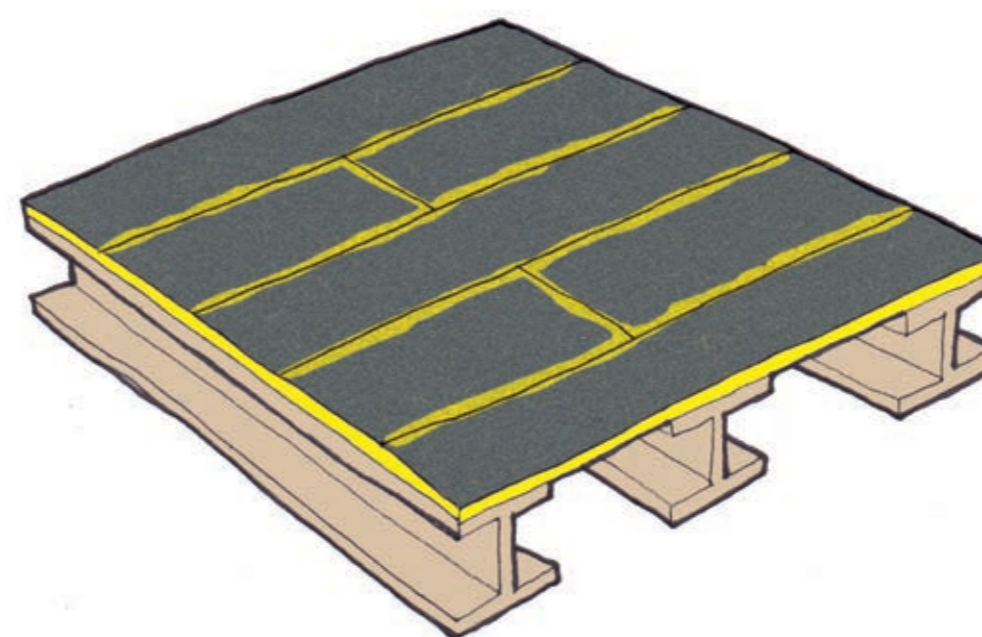

Features and benefits

- ✓ Low cost option – minimises on costs.
- ✓ One adhesive – can be used for T&G and bonding onto I-Joist.
- ✓ Easy to use – 1kg easy to hold bottle with easy flow nozzle.
- ✓ Foaming adhesive – can be seen in the joints making sure a seal is made.

Storage instructions

Protect from frost and moisture. Store in a cool (from +5°C to +25°C), dry place in original unopened packaging. Opened containers must be closed airtight and used up as soon as possible.

Recommended usage

When using CaberfixD4 adhesive to bond the board to joist, and also the T&G joint, we recommend the following:

Board size	Boards per pack	Required bottles
18mm	80	15
22mm	66	12

Features and benefits

Manufactured using 22mm P5 grade chipboard with a heavy duty PU coating.

- ✓ Meets requirements where customers prefer a permanently bonded coating to a removable film
- ✓ Coating is robust and fully waterproof allowing exposure to the weather and site traffic
- ✓ Safe working platform – slip-resistant coating and assists with fall protection
- ✓ All systems are fully BBA approved – can be exposed to the elements for 42 days



www.norbord.co.uk